


### DTM06-12SA Pin Assignment

Pin	Function	Connection	Wire Color
A.1	12 V	DT04-4P Pin 1	Red
A.2	Ground	Flying Lead	Black
A.3	Override	DT04-4P Pin	White
A.4	Ground	DT04-4P Pin 2	Black
A.5	Hot Oil	DT04-3P Pin C	White
A.6	Low Oil	DT04-3P Pin A	Red
A.7	Low Pressure	DT04-3P Pin B	Black
A.8			Unused
A.9	PTO Power	Metri-Pack 150.2 Pin A	Red
A.10	Ground	Metri-Pack 150.2 Pin B	Black
A.11	PTO Enable	Flying Lead	Red
A.12	Ground	Metri-Pack 280 Pin B	White

### DT04-3P Pin Assignment

Pin	Function	Connection	Color
A	Low Oil	DTM06-12SA Pin A.6	Red
B	Low Pressure	DTM06-12SA Pin A.7	Black
C	Hot Oil	DTM06-12SA Pin A.5	White

Two-Way Metri-Pack 280  
1530027 Male Housing  
12077411 Female Sockets  
12015323 Seal  
15300014 TPA Lock

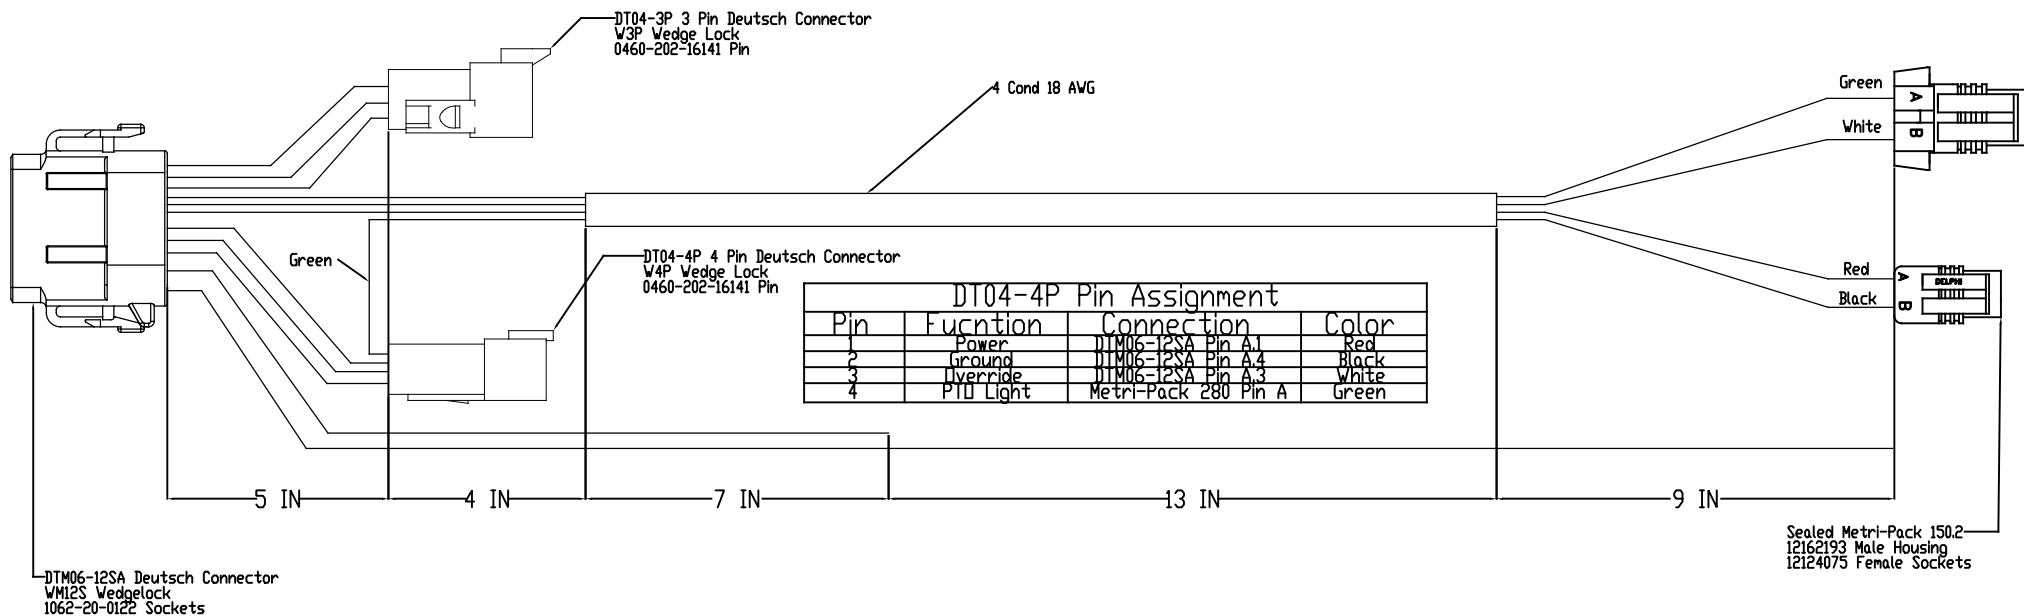

### DT04-4P Pin Assignment

Pin	Function	Connection	Color
1	Power	DTM06-12SA Pin A.1	Red
2	Ground	DTM06-12SA Pin A.4	Black
3	Override	DTM06-12SA Pin A.3	White
4	PTO Light	Metri-Pack 280 Pin A	Green

**Muncie Power Products, Inc.**  
Muncie, IN U.S.A.

<b>TITLE</b> Advantage Plus PTO Shut-Off Harness		<b>CASTING NO.</b>	<b>REV.</b>
<b>DRAWN BY:</b> NSZ	<b>DATE:</b> 07/24/14	<b>CASTING MATERIAL</b>	
<b>CHK. BY:</b> KW	<b>DATE:</b> 7.24.14	<b>APPD. BY:</b> BS	<b>DATE:</b> 7.24.14
UNLESS OTHERWISE SPECIFIED  SURFACE FINISH 125/ 2 PLACE DECIMALS ± 0.030 3 PLACE DECIMALS ± 0.010 EXCEPT DRILLED HOLES BREAK SHARP CORNERS ALL FILLETS AND RADII 0.12 R.		<b>WEIGHT</b> SCALE NA HEAT TREATMENT	<b>MATERIAL</b>
<b>DRAWING NUMBER:</b> APWH12A		<b>REV.</b> 02	<b>B</b>