


DB15 Pin Assignments			DTM06-6S Pin Assignments		
Pin Number	Wire Connection	Wire Color	Pin Number	Wire Connection	Wire Color
1	-	-	1	DB15 Pin 8	Green (3 Cond.)
2	DTM06-6S Pin 2	Red (3 Cond.)	2	DB15 Pin 2	Red (3 Cond.)
3	-	-	3	DT06-4S Pin 3/Resistor	Red (2 Cond.)/Red (Resistor)
4	DT06-4S Pin 1	Red (4 Cond.)	4	DT06-4S/Resistor	Black(2 Cond.)/Black (Resistor)
5	-	-	5	DB15 Pin 7	Black (3 Cond.)
6	-	-	6	-	-
7	DTM06-6S Pin4	Black (3 Cond.)	DT06-4S Pin Assignments		
8	DTM06-6S Pin 1	Green (3 Cond.)	Pin Number	Wire Connection	Wire Color
9	DT06-4S Pin 3	Green (4 Cond.)	1	DB15 Pin 4	Red (4 Cond.)
10	DT06-4S Pin 4	White (4 Cond.)	2	DB15 Pin 11	Black (4 Cond.)
11	DT06-4S Pin 2	Black (4 Cond.)	3	DB15 Pin 9/DTM06-6S Pin 3	Green (4 Cond.)/ Red (2 Cond.)
12	-	-	4	DB15 Pin 10/DTM06-6S Pin 2	White (4 Cond.)/Black (2 Cond.)
13	-	-	Cable Lengths		
14	-	-	Cable Type	Length (Inches)	
15	-	-	4 Cond.	23	
			2 Cond.	9	
			3 Cond.	26	

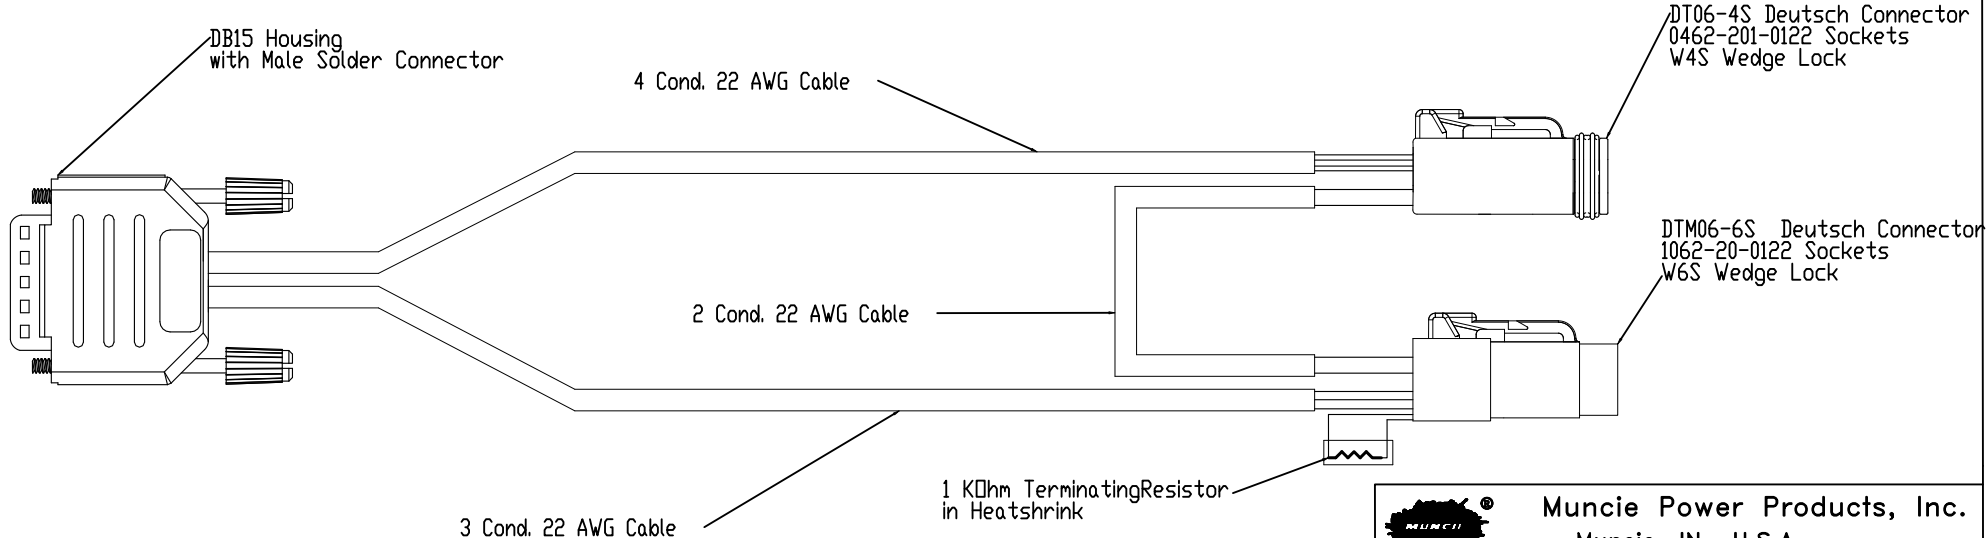

MUNCIE Muncie Power Products, Inc.
Muncie, IN U.S.A.

TITLE Advantage Plus Joystick Harness		CASTING NO.	REV.
DRAWN BY: NSZ	DATE: 07/31/13	CASTING MATERIAL	
CHK. BY: KW	DATE: 7.31.13	APPD. BY: BS	DATE: 7.31.13
UNLESS OTHERWISE SPECIFIED SURFACE FINISH 125/ 2 PLACE DECIMALS ± 0.030 3 PLACE DECIMALS ± 0.010 EXCEPT DRILLED HOLES BREAK SHARP CORNERS ALL FILLETS AND RADII 0.12 R.		WEIGHT	
		SCALE NA	
		HEAT TREATMENT	
		MATERIAL	
		DRAWING NUMBER: B	REV. 00
		APWH3A	

SIMILAR TO