



SUPPLEMENT INSTRUCTION SHEET FOR CS6

WITH HYDRAULIC BLOCK SOLENOID ACTIVATION VALVE • PN 35M12340A OR 35M24340A

Used with IN84-03 PTO Installation Manual


On Automatic Transmissions with externally, solenoid controlled converter neutral lock-up, install the ClutchShift activation circuit completely separate of the lock-up circuit. Do not use the same valve to operate both circuits.

NOTE 1: Green light to turn "ON" when PTO switch is activated.

NOTE 2: Solenoid to be mounted in engine compartment out of direct spray of road contaminants.

NOTE 4: Not supplied with standard installation kit. Order Muncie 131-2-0001 separately.

NOTE 5: Optional street tee provided for clearance mount of pressure switch. Use as needed.

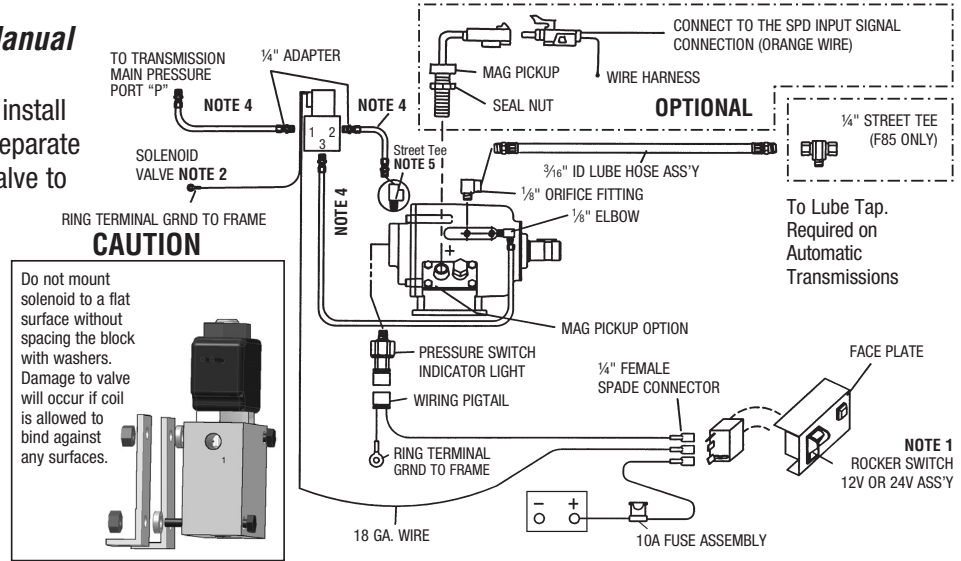

Muncie®
Power
Products

Member of the Interpump Group

IN02-03 (Rev. 12-16)

201 East Jackson Street • Muncie, Indiana 47305
800-367-7867 • Fax 765-284-6991 • info@munciepower.com • www.munciepower.com
Specifications are subject to change without notice. Visit www.munciepower.com
for warranties and literature. All rights reserved. © Muncie Power Products, Inc. (2011)