




FORD F-650/F-750 (2015 & Later) F-250 – F-550 (2017 & Later) DIESEL PRE-SET THROTTLE ADJUST

INSTALLATION INSTRUCTIONS FOR 34T43695

1. Locate the Ford SEIC blunt cut wires under the dash near the steering column.
2. Follow connections as listed here for Clutch Pump.
3. When the Clutch Pump is engaged the engine RPM will automatically advance to the RPM set point. Use the vehicle tachometer to determine engine speed and turn the adjustment screw to set the RPM. Range 1,200 min.-2,500 Max.

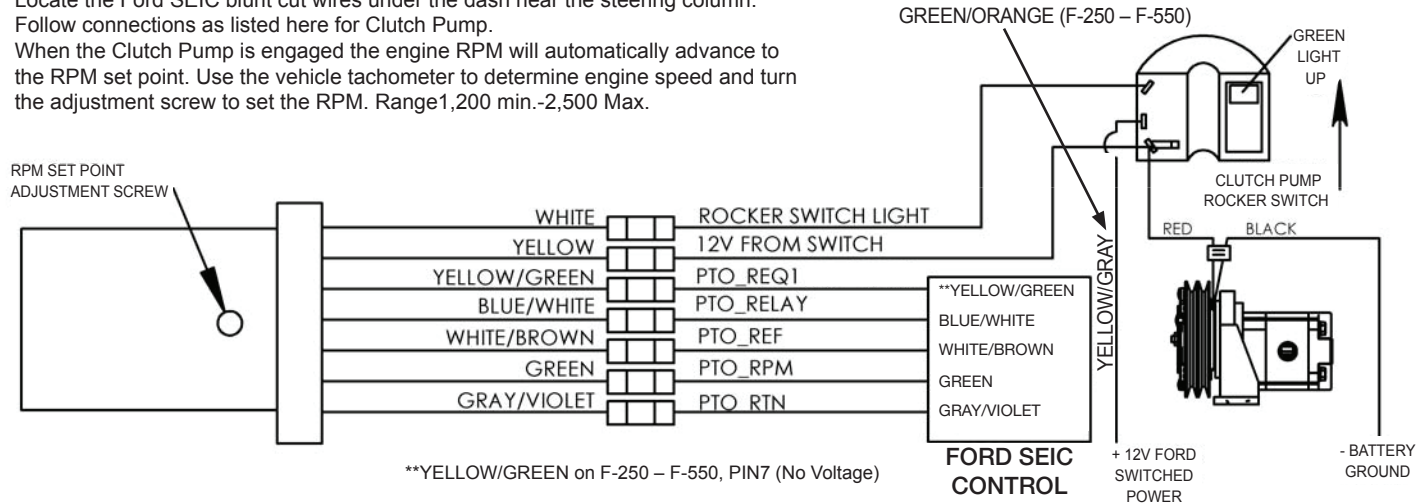



FORD F-650/F-750 (2015 & Later) F-250 – F-550 (2017 & Later) GAS PRE-SET THROTTLE ADJUST

INSTALLATION INSTRUCTIONS FOR 34T43692

1. Locate the Ford SEIC blunt cut wires under the dash near the steering column.
2. Follow connections as listed here for Clutch Pump.
3. When the Clutch Pump is engaged the engine RPM will automatically advance to the RPM set point. Use the vehicle tachometer to determine engine speed and turn the adjustment screw to set the RPM. Range 1,200 min.-2,500 Max.

