


POWER TAKE-OFFS FOR EATON ENDURANT & PACCAR TRANSMISSIONS



TG SERIES

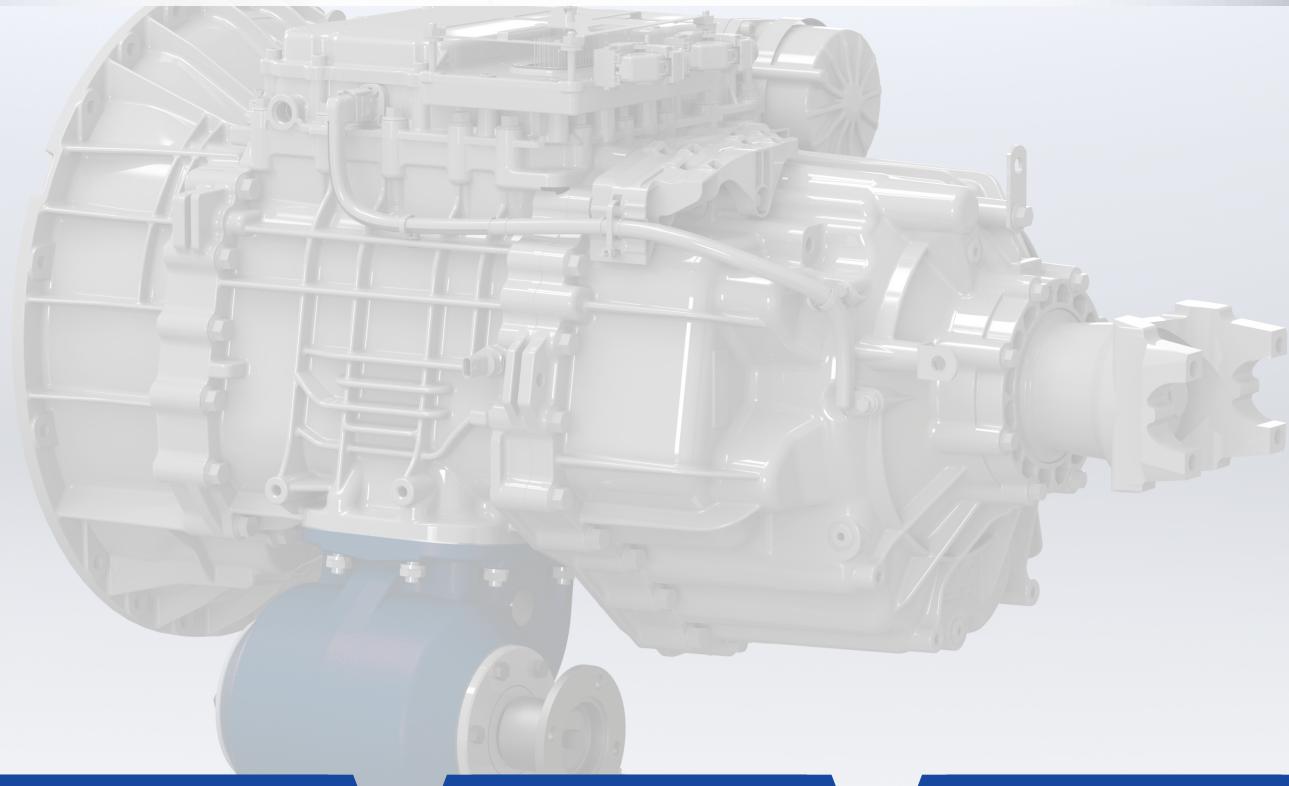

Eaton Endurant HD and XD,
and PACCAR TX-12 and TX-18

82 SERIES



Eaton Endurant HD and XD,
and PACCAR TX-12 and TX-18

SH SERIES




Eaton Endurant HD
and PACCAR TX-12

**BUILT FOR DURABILITY, HIGH TORQUE, AND
DEMANDING HEAVY-DUTY APPLICATIONS**



8-BOLT MECHANICAL AIR SHIFT



TG SERIES

- Versatile PTO with 7 speed ratios for Eaton Endurant and PACCAR transmissions
- Lightweight, reduced noise, and superior heat dissipation

SPECIFICATIONS

MAX. TORQUE

INTERMITTENT:	285 lbs.ft. (386 Nm)
CONTINUOUS:	200 lbs.ft. (270 Nm)

MAX. HP (@ 1,000 RPM)

INTERMITTENT:	54 HP (40 kW)
CONTINUOUS:	38 HP (28 kW)

APPROX. WEIGHT

22 lbs. (10 Kg.)



82 SERIES

- Cast iron housing with air shift only option
- Designed for use with high-torque mechanical equipment
- 6 speed ratios for Eaton Endurant and PACCAR transmissions

MAX. TORQUE

INTERMITTENT:	500 lbs.ft. (678 Nm)
CONTINUOUS:	350 lbs.ft. (475 Nm)

MAX. HP (@ 1,000 RPM)

INTERMITTENT:	95 HP (71 kW)
CONTINUOUS:	67 HP (50 kW)

APPROX. WEIGHT

85 lbs. (38.6 Kg.)



SH SERIES

Available for Eaton Endurant HD and PACCAR TX-12 applications only

- Integral air shift PTO
- 3 speed ratios for Eaton Endurant and PACCAR transmissions
- High-torque capacity to meet demanding applications

MAX. TORQUE

INTERMITTENT:	366 lbs.ft. (496 Nm)
CONTINUOUS:	256 lbs.ft. (347 Nm)

MAX. HP (@ 1,000 RPM)

INTERMITTENT:	70 HP (52 kW)
CONTINUOUS:	49 HP (37 kW)

APPROX. WEIGHT

35 lbs. (15.9 Kg.)

SEE OUR REAR MOUNT PTO OPTIONS, AN IDEAL SOLUTION FOR DUAL PTO SETUPS:
P81 SERIES, P82 SERIES, P84 SERIES, AND P86 SERIES



A Member of the Interpump Group

MI17-27 (Rev. 01-26)

201 East Jackson Street, Muncie, Indiana 47305
800-367-7867 • Fax: 765-284-6991 • info@munciepower.com

Specifications are subject to change without notice. Visit www.munciepower.com for warranties and literature. All rights reserved. © Muncie Power Products, Inc. (2018)