




CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

	EATON TRANSMISSION	RIGHT SIDE ONLY (LEFT SIDE TURN PAGE)	
	3905A, 3905B, 3905C, FSO-4305A, FSO-4305B, FSO-4305C FSO-4405A, FSO-4405B, FSO-4405C	SAE 6-BOLT OPENING	
		PTO DRIVE GEAR DATA: 36T 9.41P 20.7° PA 25 R.H. LOCATION: Front PLMF: 1.085 PLV: 703 FPM RPM: 636	

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM of PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	TG6S-U6807-C1BX	1, 2	Crnk	57			40TC9468	23M60500+23M60450	20MK6610	Cable	230	44
	TG6S-U6808-C1BX	1, 2	Crnk	70			40TC9468	23M60500+23M60450	20MK6610	Cable	230	44
	TG6S-U6809-C1BX	1, 2	Crnk	73			40TC9468	23M60500+23M60450	20MK6610	Cable	205	39
	TG6S-U6812-C1BH	1, 2	Crnk	89			40TC9468	23M60500+23M60450	20MK6610	Cable	210	40
	TG6S-U6813-C1BH	1, 2	Crnk	102			40TC9468	23M60500+23M60450	20MK6610	Cable	210	40
	TG6S-U6815-C1BH	1, 2	Crnk	114			40TC9468	23M60500+23M60450	20MK6610	Cable	195	37
	TG6S-U6818-C1BH	1, 2	Crnk	136			40TC9468	23M60500+23M60450	20MK6610	Cable	175	33
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												

ADAPTER TO CHANGE ROTATION No Adapter Available REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM of PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

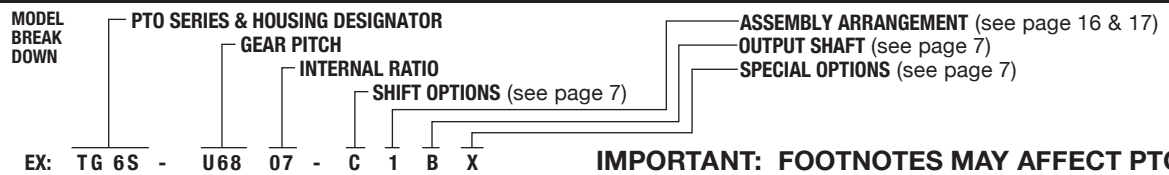



IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- TG Series Input Gear: #03T34284 — Refer to kit program on pages 10 & 11.
- Optional: U68 Input Gear can be replaced by S68 Input Gear to obtain output speed 92% of speed shown. Add spacer 23M60200S and stud kit 20MK6603.

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

EATON TRANSMISSION						LEFT SIDE ONLY (RIGHT SIDE TURN PAGE)		
		3905A, 3905B, 3905C, FSO-4305A, FSO-4305B, FSO-4305C FSO-4405A, FSO-4405B, FSO-4405C				PTO DRIVE GEAR DATA:		
						LOCATION: PLV:	PLMF: RPM:	

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM of PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	NO PTO OPENING - SEE OTHER SIDE											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												

ADAPTER TO CHANGE ROTATION

REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM of PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

MODEL BREAK DOWN

PTO SERIES & HOUSING DESIGNATOR

GEAR PITCH

INTERNAL RATIO

SHIFT OPTIONS (see page 7)

ASSEMBLY ARRANGEMENT (see page 16 & 17)

OUTPUT SHAFT (see page 7)

SPECIAL OPTIONS (see page 7)

EX: TG 6S - U68 07 - C 1 B X

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES: