


HINO TRANSMISSION							RIGHT SIDE ONLY (LEFT SIDE TURN PAGE)			
M 550							PTO DRIVE GEAR DATA:			
							LOCATION: PLV:			PLMF: RPM:

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	NO PTO OPENING - SEE OTHER SIDE											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												

ADAPTER TO CHANGE ROTATION No Adapter Available REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX



8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

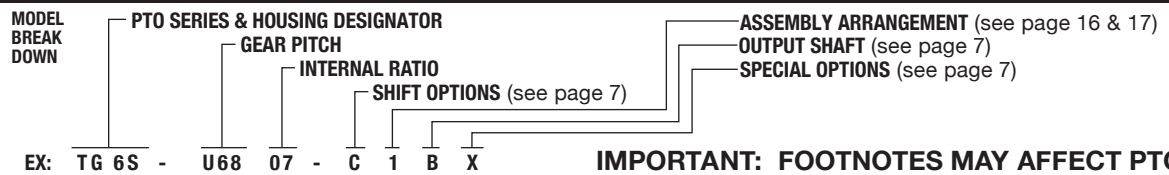


IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

HINO TRANSMISSION								LEFT SIDE ONLY (RIGHT SIDE TURN PAGE)					
	M 550 1ST GEAR 4.981							METRIC 6-BOLT OPENING					
								PTO DRIVE GEAR DATA:					
6-BOLT TYPE	PTO MODEL NUMBER		FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
					HI	LO	REV					TORQUE	HP
SINGLE GEAR													
SINGLE SPEED MULTI GEAR	HC6S-P09H4-A3BX		1, 2	Opp	114				6036SP07500	199K8240000	AIR	147	28
SH SERIES													
CLUTCH SHIFT													
1 FWD. 1 REV.													
ADAPTER TO CHANGE ROTATION			No Adapter Available						REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER		FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
					HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR													
1 FWD. 1 REV.													

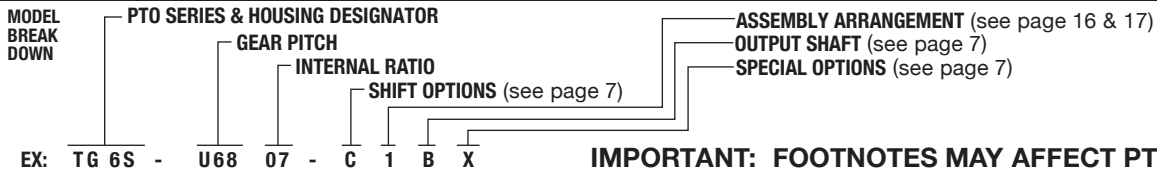

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- 1 Air Shift PTO option shown.
- 2 Output is 1000 Series companion flange. Direct Mount "K" option is available. See page 29 in General Information.