

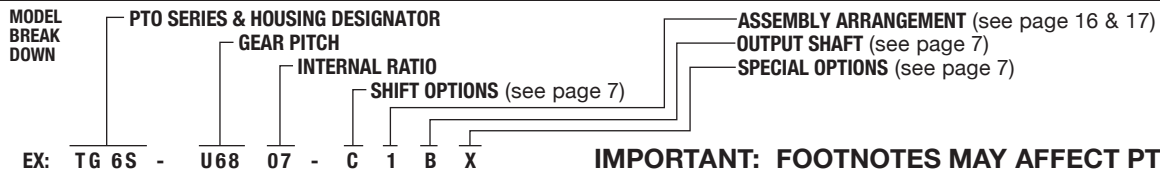


ISUZU TRANSMISSION						RIGHT SIDE ONLY (LEFT SIDE TURN PAGE)		
		MZZ-6U				PTO DRIVE GEAR DATA:		
						LOCATION: PLV:	PLMF: RPM:	

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	NO PTO OPENING - SEE OTHER SIDE											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION											REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX	



8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												



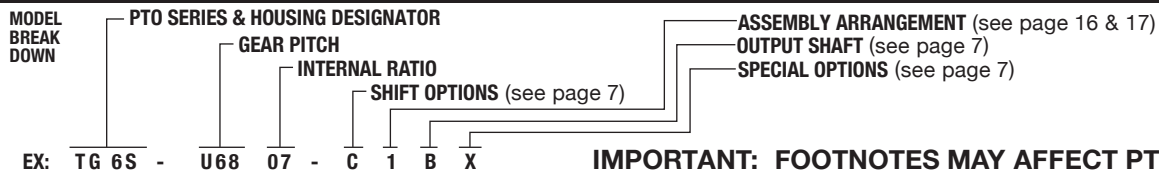
IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

ISUZU TRANSMISSION								LEFT SIDE ONLY (RIGHT SIDE TURN PAGE)				
		MZZ-6U						METRIC 8-BOLT OPENING				
								PTO DRIVE GEAR DATA:				PLMF: 1.28
								37T 8.16P 20° PA 25° R.H.				
								LOCATION: Front		RPM: 543		
								PLV:				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	HC6S-P09J4-C3BX	1, 2, 3	Opp	87			602AD251000	6036SP25000	199K8620000 199K8610000	Cable	133	25
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION		No Adapter Available						REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												



IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- 1 Cable Shift option only.
- 2 PTO output includes a 1000 Series companion flange. Mate with flange yoke, 10-2-29, sold separately. SAE-B direct mount output option "K" available.
- 3 Two mounting kits are shown and required. One kit mounts PTO to adapter and the other mounts the adapter to the transmission. The spacer is installed between the PTO and adapter.