

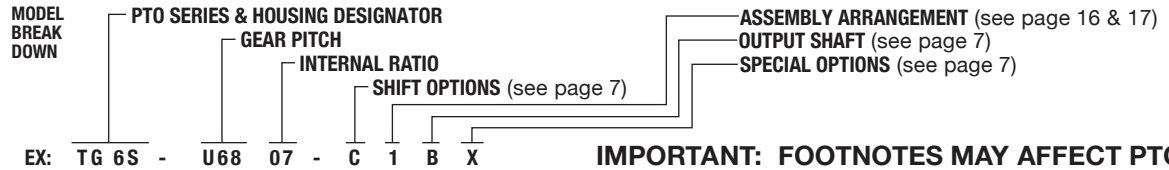


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

ZF/MERITOR TRANSMISSION								RIGHT REAR ONLY (LEFT REAR TURN PAGE)				
 FREEDOMLINE MO-13Z12A-A13, MO-14Z12A-A14, MO-15Z12A-A15, MO-16Z12A-A16 (12 Speed Overdrive) M13Z12A-A13, M14Z12A-A14 (12 Speed Direct Drive) Footnote (1, 3, 4, 5)								METRIC 4-BOLT OPENING				
								PTO DRIVE GEAR DATA:		LOCATION: None PLMF: PLV: RPM: 1,353		
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	RS4S-P82Z1-E1CX	2	Crnk	177					Included	Elec/Air	220	42
	RS4S-P86Z3-Z1CX	6	Crnk	180			601K5400000		199K7930000	Elec/Air	332	63
	RS4S-P86Z4-Z1CX	6	Crnk	125			601K5400000		199K7930000	Elec/Air	369	70
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION								REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				



8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												



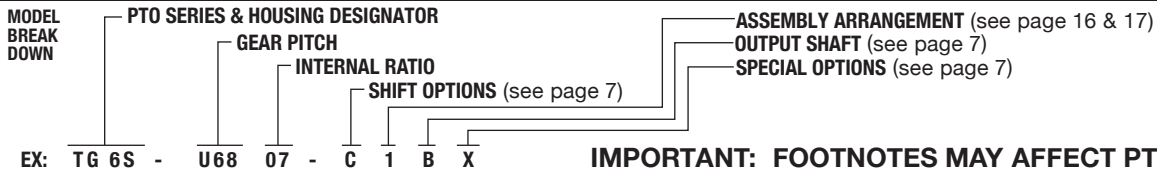
IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

- FOOTNOTES:**
- Counter shaft rear mount PTO.
 - PTO interferes with SPL170 or SPL250 transmission yoke. The Rockwell RPL series does clear PTO.
 - Direct mount pump option "K" available, total pump system weight limit 25 lbs.
 - Direct Drive 12 speed transmission, multiply speed shown by .61.
 - Transmission must be programmed for PTO operation, check with Dealer before obtaining a PTO.
 - PTO interferes with Rockwell RPL-25 transmission yoke.

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

ZF/MERITOR TRANSMISSION							LEFT REAR ONLY (RIGHT REAR TURN PAGE)					
 FREEDOMLINE MO-13Z12A-A13, MO-14Z12A-A14, MO-15Z12A-A15, MO-16Z12A-A16 (12 Speed Overdrive) M13Z12A-A13, M14Z12A-A14 (12 Speed Direct Drive) (See Other Side)							METRIC 4-BOLT OPENING					
							PTO DRIVE GEAR DATA:					
							LOCATION: None		PLMF: 0			
							PLV:		RPM:			
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	NO PTO OPENING - SEE OTHER SIDE											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION							REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX					

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												



IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES: