



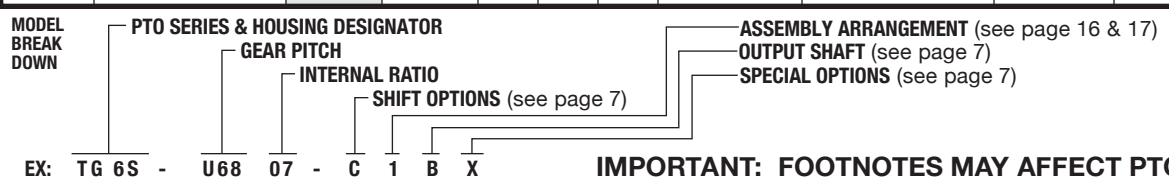
CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

<b>MITSUBISHI TRANSMISSION</b>						<b>RIGHT SIDE ONLY</b> (LEFT SIDE TURN PAGE)		
		<b>M050S5, M050S6-OD</b>				<b>PTO DRIVE GEAR DATA:</b> LOCATION: PLV:                      PLMF: RPM:		

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	<b>NO PTO OPENING - SEE OTHER SIDE</b>											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												

ADAPTER TO CHANGE ROTATION
REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX



8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												



**IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION**


**FOOTNOTES:**

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

<b>MITSUBISHI TRANSMISSION</b>					<b>LEFT SIDE ONLY</b> (RIGHT SIDE TURN PAGE)		
 <b>M050S5, M050S6-OD</b> Footnote (3) <b>1st = 6.875</b>					<b>METRIC 6-BOLT OPENING</b>		
					<b>PTO DRIVE GEAR DATA:</b> 35T 7.582P 20° PA 17 R.H. LOCATION: Front    PLMF: 2.50 PLV: 736                RPM: 537		

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	HC6S-M7618-A3KX	1, 2	Opp	99					Included	Air	206	39
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION			No Adapter Available					REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

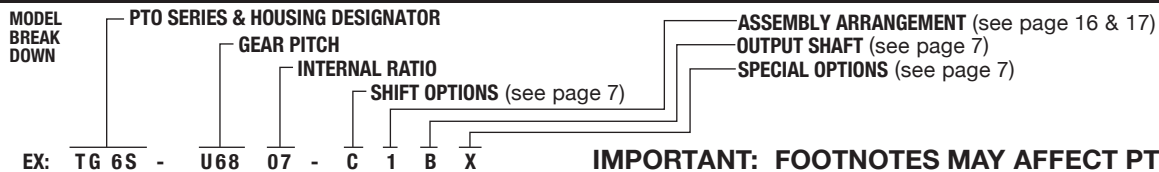

**IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION**

**FOOTNOTES:**

- 1 Direct mount SAE "B" option ("K") shown. "B" option, 1000 Series companion flange, is available.
- 2 HC Series available with air shift "A" option only.
- 3 Requires the use of spacer to mount, supplied (602AD239000).