

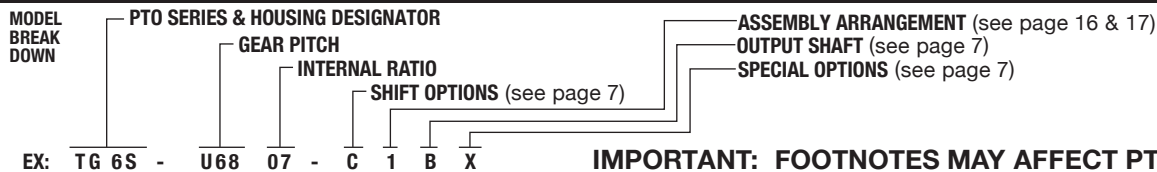


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

MUNCIE TRANSMISSION								LEFT SIDE ONLY (RIGHT SIDE TURN PAGE)				
	SS88-14X5-A00XXX SS88-21XC-A00XXX SPEED RATIO BASED ON INPUT SPEED 1:1 TO ENGINE Footnote (4)							SAE 8-BOLT OPENING				
								PTO DRIVE GEAR DATA:				
				50T 6P 20° PA Spur		PLMF: 0.808						
				LOCATION: Front		RPM: 1,000		PLV: 2,182				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	TG8B-U6804-C3BX	1	Crnk	75					Included	Cable	285	54
	TG8B-U6805-C3BX	1	Crnk	98					Included	Cable	270	51
	TG8B-U6806-C3BX	1	Crnk	127					Included	Cable	245	47
	TG8B-U6807-C3BX	1	Crnk	150					Included	Cable	230	44
	TG8B-U6808-C3BX	1	Crnk	183					Included	Cable	230	44
SH SERIES	SH8B-U6005-E3BX		Crnk	98					Included	Elec/Air	400	76
	SH8B-U6807-E3BX		Crnk	146					Included	Elec/Air	400	76
	SH8B-U6809-E3BX		Crnk	181					Included	Elec/Air	375	71
CLUTCH SHIFT	CS8B-U6003-E3BX		Crnk	69					Included	Power	300	57
	CS8B-U6004-E3BX		Crnk	92					Included	Power	300	57
	CS8B-U6005-E3BX		Crnk	98					Included	Power	300	57
	CS8B-U6807-E3BX		Crnk	146					Included	Power	300	57
	CS8B-U6809-E3BX		Crnk	181					Included	Power	275	52
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION			No Adapter Available				REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX					

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR	828B-U6805-L3CX		Crnk	69					Included	Lever	500	95
	828B-U6808-L3CX		Crnk	110					Included	Lever	450	85
	828B-U6809-L3CX		Crnk	137					Included	Lever	410	78
	828B-U6810-L3CX		Crnk	147					Included	Lever	410	78
	828B-U6812-L3CX		Crnk	169					Included	Lever	375	71
1 FWD. 1 REV.												



IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- 1 TG Series Input Gear: #03T34284. Refer to kit program on pages 10 and 11.
- 2 Metric stud kit included.
- 3 The 2 base models have different through shaft torque ratings, SS88-14X5 is rated to 14,000 lb.ft. and the SS88-21XC is rated to 21,000 lb.ft. The through torque does not affect the PTOs used. This application page applies to both models. The PTO drive gear is rated to 1,200 lb. ft. of intermittent torque.
- 4 Add suspension bracket kit P.N. 299K2870000, sold separately.