

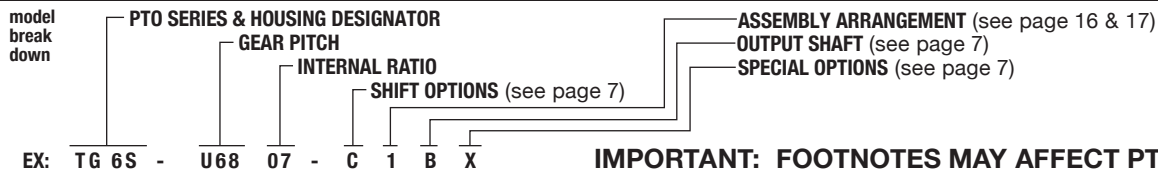


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)								RIGHT SIDE ONLY (LEFT SIDE TURN PAGE)				
		CM-6252B (301085, 301258, 301417)						SAE 8-BOLT OPENING				
								PTO DRIVE GEAR DATA: 35T 6P 17.5°PA 26°10'37" R.H. LOCATION: Front PLMF: .439 PLV: 1276 FPM RPM: 750				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	TG8S-S6004-C1BX	1	Opp	45				23M80375	20MK8815	Cable	285	54
	TG8S-S6005-C1BX	1	Opp	59				23M80375	20MK8815	Cable	270	51
	TG8S-S6006-C1BX	1	Opp	76				23M80375	20MK8815	Cable	245	47
	TG8S-S6007-C1BX	1	Opp	91				23M80375	20MK8815	Cable	230	44
	TG8S-S6008-C1BX	1	Opp	111				23M80375	20MK8815	Cable	230	44
	TG8S-S6009-C1BX	1	Opp	116				23M80375	20MK8815	Cable	205	39
	TG8S-S6012-C1BH	1	Opp	142				23M80375	20MK8815	Cable	210	40
	TG8S-S6013-C1BH	1	Opp	162				23M80375	20MK8815	Cable	210	40
	TG8S-S6015-C1BH	1	Opp	183				23M80375	20MK8815	Cable	195	37
	TG8S-S6018-C1BH	1	Opp	216				23M80375	20MK8815	Cable	175	33
SH SERIES	SH8S-S6007-E1BX		Opp	87				23M80295	20MK8815	Elec/Air	400	76
CLUTCH SHIFT	CS8S-S6007-E1BX		Opp	87				23M80295	20MK8815	Power	300	57
1 FWD. 1 REV.	RL8S-S6005-L3BX	2	Opp	69		69		23M80375	20MK8815	Lever	200	38
ADAPTER TO CHANGE ROTATION			No Adapter Available					REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												





IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- 1 TG Series Input Gear: #03T34286 — Refer to kit program on pages 10 & 11.
- 2 Do not use for continuous duty applications.


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)	LEFT SIDE ONLY (RIGHT SIDE TURN PAGE)	
 CM-6252B (301085, 301258, 301417)	SAE 6-BOLT OPENING	
	PTO DRIVE GEAR DATA: 35T 6P 17.5°PA 26°10'37" R.H. LOCATION: Front PLMF: 1.273 PLV: 1276 FPM RPM: 750	

6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	SINGLE SPEED PTO APPLICATIONS NOT POSSIBLE DUE TO NON-STANDARD MOUNTING DEPTH											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												

ADAPTER TO CHANGE ROTATION No Adapter Available REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

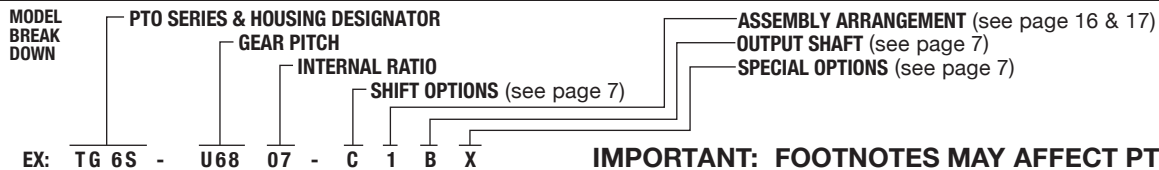

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES: