

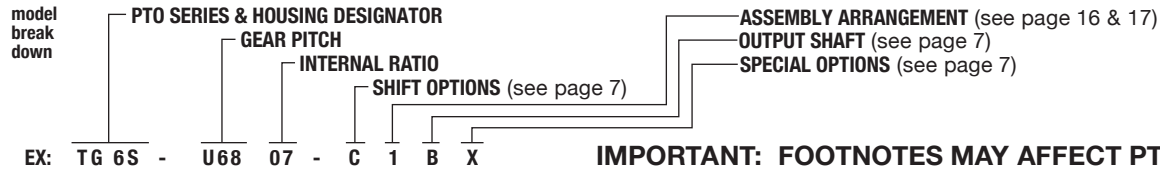


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)								RIGHT SIDE ONLY (BOTTOM OPENING TURN PAGE)				
		PS110-7B, PS125-7B (301445), 1372B (301325, 301405)						SAE 6-BOLT OPENING				
								PTO DRIVE GEAR DATA: 56T 6P 20°PA Spur LOCATION: Front PLV: 850 FPM				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	TG6S-X6806-C1BM	1, 2, 5	Opp	50				23M60350	20MK6604	Cable	245	47
	TG6S-X6807-C1BM	1, 2, 5	Opp	59				23M60350	20MK6604	Cable	230	44
	TG6S-X6808-C1BM	1, 2, 5	Opp	72				23M60350	20MK6604	Cable	230	44
	TG6S-X6809-C1BM	1, 2, 5	Opp	75				23M60350	20MK6604	Cable	205	39
	TG6S-X6812-C1BQ	1, 2, 5	Opp	92				23M60350	20MK6604	Cable	210	40
	TG6S-X6813-C1BQ	1, 2, 5	Opp	105				23M60350	20MK6604	Cable	210	40
	TG6S-X6815-C1BQ	1, 2, 5	Opp	118				23M60350	20MK6604	Cable	195	37
	TG6S-X6818-C1BQ	1, 2, 5	Opp	140				23M60350	20MK6604	Cable	175	33
SH SERIES	SH6S-U6807-E1BX	5	Opp	56				23M60350	20TK4434	Elec/Air	400	76
	SH6S-U6809-E1BX	5	Opp	70				23M60350	20TK4434	Elec/Air	375	71
	SH6S-U6812-E1BX	5	Opp	93				23M60350	20TK4434	Elec/Air	325	62
CLUTCH SHIFT	CS6S-U6807-E1BX	5	Opp	56				23M60350	20TK4434	Power	300	57
	CS6S-U6809-E1BX	5	Opp	70				23M60350	20TK4434	Power	275	52
	CS6S-U6812-E1BX	5	Opp	93				23M60350	20TK4434	Power	275	52
1 FWD. 1 REV.	RL6D-U6805-L3BX	4	Opp	44		44		23M60500	20MK6605	Lever	200	38
ADAPTER TO CHANGE ROTATION		3	40TU6830-1 + 23M60350 + 20MK0115					REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												





EX: TG 6S - U68 07 - C 1 B X **IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION**


FOOTNOTES:

- 1 TG Series Input Gear: #03T96773 — Refer to kit program on pages 10 & 11.
- 2 PTO supplied with special idler plate due to transmission interference. Use idler cap kit 15MK33977.
- 3 Change TG Series to TG6S-U68 input gear. Use standard stud kit. 23M60200S + 20MK6603 required for RG and RL on PTO side of adapter.
- 4 Do not use for continuous duty applications.
- 5 Optional: X68 & U68 input gear can be replaced by S68 input gear to obtain output speed 92% of speed shown. Add spacer 23M60200S and change stud kit to 20MK6606.

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)								BOTTOM OPENING ONLY (RIGHT SIDE TURN PAGE)				
		PS110-7B, PS125-7B (301445), 1372B (301325, 301405)						SAE 6-BOLT OPENING				
								PTO DRIVE GEAR DATA:				
								56T 6P 20°PA Spur LOCATION: Front PLMF: .668 PLV: 850 FPM RPM: 348				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	TG6S-X6806-C1BM	1, 2, 5	Opp	50				23M60350	20MK6604	Cable	245	47
	TG6S-X6807-C1BM	1, 2, 5	Opp	59				23M60350	20MK6604	Cable	230	44
	TG6S-X6808-C1BM	1, 2, 5	Opp	72				23M60350	20MK6604	Cable	230	44
	TG6S-X6809-C1BM	1, 2, 5	Opp	75				23M60350	20MK6604	Cable	205	39
	TG6S-X6812-C1BQ	1, 2, 5	Opp	92				23M60350	20MK6604	Cable	210	40
	TG6S-X6813-C1BQ	1, 2, 5	Opp	105				23M60350	20MK6604	Cable	210	40
	TG6S-X6815-C1BQ	1, 2, 5	Opp	118				23M60350	20MK6604	Cable	195	37
	TG6S-X6818-C1BQ	1, 2, 5	Opp	140				23M60350	20MK6604	Cable	175	33
SH SERIES	SH6S-U6807-E1BX	5	Opp	56				23M60350	20TK4434	Elec/Air	400	76
	SH6S-U6809-E1BX	5	Opp	70				23M60350	20TK4434	Elec/Air	375	71
	SH6S-U6812-E1BX	5	Opp	93				23M60350	20TK4434	Elec/Air	325	62
CLUTCH SHIFT	CS6S-U6807-E1BX	5	Opp	56				23M60350	20TK4434	Power	300	57
	CS6S-U6809-E1BX	5	Opp	70				23M60350	20TK4434	Power	275	52
	CS6S-U6812-E1BX	5	Opp	93				23M60350	20TK4434	Power	275	52
1 FWD. 1 REV.	RL6D-U6805-L3BX	4	Opp	44		44		23M60500	20MK6605	Lever	200	38
ADAPTER TO CHANGE ROTATION								REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

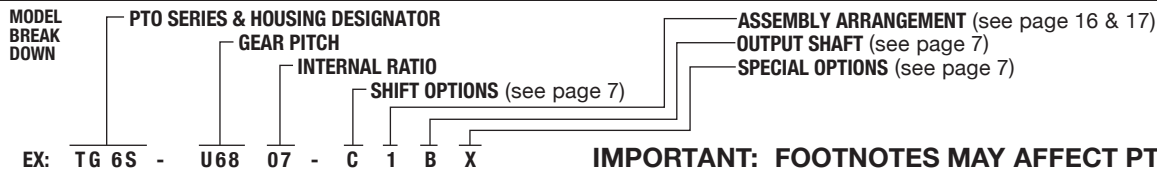

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- 1 TG Series Input Gear: #03T96773 — Refer to kit program on pages 10 & 11.
- 2 PTO supplied with special idler plate due to transmission interference. Use idler cap kit 15MK33977.
- 3 Change TG Series to U68. Add 23M60200S + 20MK6603 for RL Series on PTO side of adapter.
- 4 Do not use for continuous duty applications.
- 5 Optional: X68 & U68 input gear can be replaced by S68 input gear to obtain output speed 92% of speed shown. Add spacer 23M60200S and change stud kit to 20MK6606.