


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

VOLVO TRANSMISSION								REAR ONLY					
		R1700, SR1700, VT1414 VT809, VT1309 Footnote (1)		METRIC 4-BOLT OPENING		PTO DRIVE GEAR DATA:							
				LOCATION: PLV:		PLMF: RPM:							
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO		
				HI	LO	REV						TORQUE	HP
SINGLE GEAR													
SINGLE SPEED MULTI GEAR	RS4S-P86VC-A1CX	1, 2	Crnk	95						199K8020000	Air	332	63
SH SERIES													
CLUTCH SHIFT													
1 FWD. 1 REV.													
ADAPTER TO CHANGE ROTATION		No Adapter Available							REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE%			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

PTO SERIES & HOUSING DESIGNATOR
 GEAR PITCH
 INTERNAL RATIO
 SHIFT OPTIONS (see page 18)
 ASSEMBLY ARRANGEMENT (see page 18)
 OUTPUT SHAFT (see page 18)
 SPECIAL OPTIONS (see page 18)


EX: TG 6S - U68 07 - C 1 B X

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION


FOOTNOTES:

- SR1700 OR VT1414 speed shown in LO, multiply speed shown by 1.24 for High range.
- Rear mounted PTO, model shown with 1310 Series companion flange. SAE B pump mount available for pump systems weighing less than 30 lbs. See page 18 in General Information.

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

VOLVO TRANSMISSION												
		R1700, SR1700, VT1414 VT809, VT1309						PTO DRIVE GEAR DATA:				
								LOCATION: PLV:		PLMF: RPM:		
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	NO PTO OPENING - SEE OTHER SIDE											
SH SERIES												
CLUTCH SHIFT												
1 FWD. 1 REV.												
ADAPTER TO CHANGE ROTATION		No Adapter Available						REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

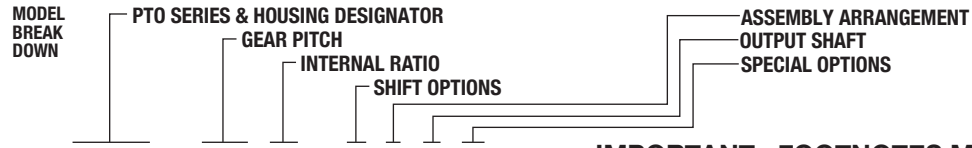

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES: