


12 VDC
Switch Assembly
30T39590

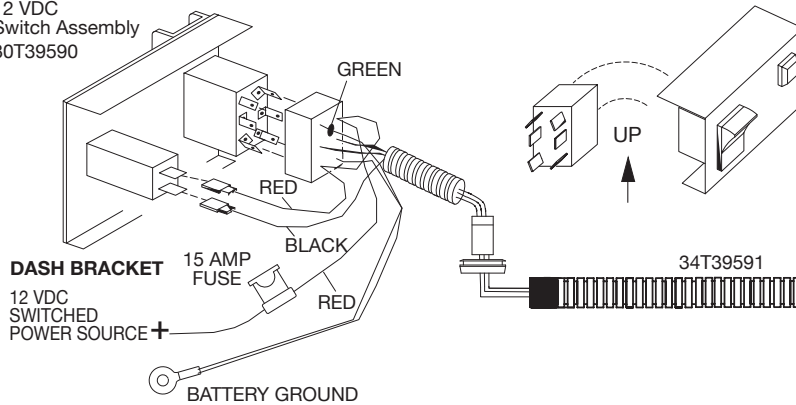

WIRING DIAGRAM FOR E-HYDRA SHIFT TG SERIES

Activation Kit #48TK4686

DASH BRACKET

15 AMP
FUSE

12 VDC
SWITCHED
POWER SOURCE +

BATTERY GROUND

IMPORTANT:

Follow PTO installation instructions IN84-03.

1. The rocker switch and dash bracket if used is to be mounted in cab within easy reach of operator.
2. PTO engagement is made by pushing rocker switch fully to the engage position and releasing switch immediately upon engagement. (Indicator light will light)
3. Drill .750 diameter hole in firewall, install black plastic grommet (P/N 37T39628) in hole and run the three-wire connector through the grommet and plug into cab harness portion of harness. Note the orientation of the connector to insure proper assembly.
4. Plug the rocker switch receptacle onto the switch so that the green wire is up **matching the position of the green light on the rocker switch**, as noted in diagram.

E-HYDRA SHIFTER KITS*


16TK4682 Standard 1 or 4 Ass'y

16TK4683 Standard 2 or 4 Ass'y

16TK4844 Allison 1000/2000 1 or 4 Ass'y

16TK4845 Allison 1000/2000 3 or 3 Ass'y

Note: * Includes shifter, indicator switch, and activation kit.

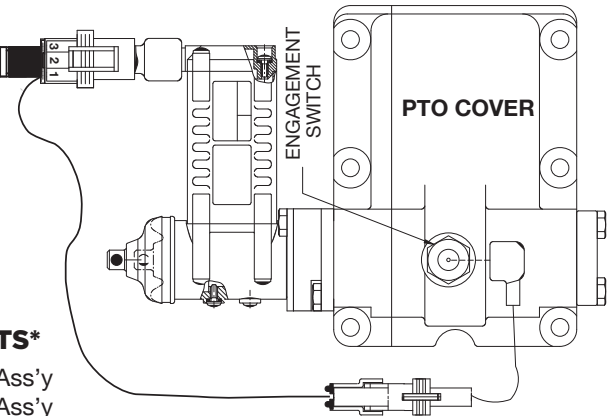

Muncie[®]
Power
Products

A Member of the Interpump Group

IN05-04 (Rev. 06-24)

201 East Jackson Street, Muncie, Indiana 47305
800-367-7867 • Fax: 765-284-6991 • info@munciepower.com

Specifications are subject to change without notice. Visit www.munciepower.com
for warranties and literature. All rights reserved. © Muncie Power Products, Inc. (2006)