

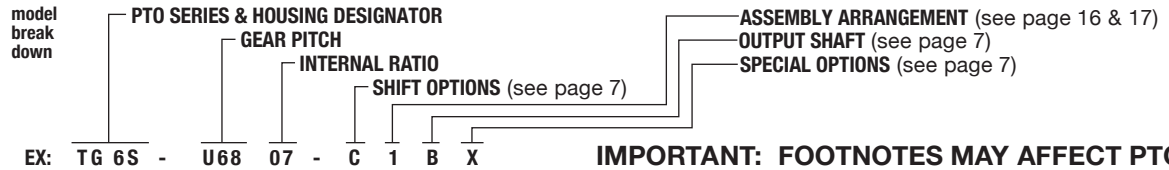


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)								RIGHT SIDE ONLY (BOTTOM OPENING TURN PAGE)				
		1010-2A (301111), 1010-4A (301112), 1020-2A (301123), 1020-4A (301124), 1410-2A (301288, 301161)						SAE 6-BOLT OPENING				
								PTO DRIVE GEAR DATA:				
								49T 6P 20° PA Spur LOCATION: Front PLMF: 1.138 PLV: 1029 FPM RPM: 481				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	TG6D-S6805-C1BX	1	Opp	42				23M60140S	20MK6602	Cable	270	51
	TG6D-S6806-C1BX	1	Opp	55				23M60140S	20MK6602	Cable	245	47
	TG6D-S6807-C1BX	1	Opp	65				23M60140S	20MK6602	Cable	230	44
	TG6D-S6808-C1BX	1	Opp	80				23M60140S	20MK6602	Cable	230	44
	TG6D-S6809-C1BX	1	Opp	83				23M60140S	20MK6602	Cable	205	39
	TG6D-S6812-C1BH	1	Opp	102				23M60140S	20MK6602	Cable	210	40
	TG6D-S6813-C1BH	1	Opp	116				23M60140S	20MK6602	Cable	210	40
	TG6D-S6815-C1BH	1	Opp	131				23M60140S	20MK6602	Cable	195	37
	TG6D-S6818-C1BH	1	Opp	155				23M60140S	20MK6602	Cable	175	33
SH SERIES	SH6D-S6807-E1BX		Opp	63				23M60140S	20TK4433	Elec/Air	400	76
	SH6D-S6809-E1BX		Opp	78				23M60140S	20TK4433	Elec/Air	375	71
	SH6D-S6812-E1BX		Opp	104				23M60140S	20TK4433	Elec/Air	325	62
CLUTCH SHIFT	CS6D-S6807-E1BX		Opp	63				23M60140S	20TK4433	Power	300	57
	CS6D-S6809-E1BX		Opp	78				23M60140S	20TK4433	Power	275	52
	CS6D-S6812-E1BX		Opp	104				23M60140S	20TK4433	Power	275	52
1 FWD. 1 REV.	RL6D-U6805-L3BX	3	Opp	54		54		23M60140S	20MK6602	Lever	200	38
ADAPTER TO CHANGE ROTATION		2	40TU6800 + 23M61500 + 23M60450 + 20MK6629					REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												





IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION


FOOTNOTES:

- 1 TG Series Input Gear: #03T94243 — Refer to kit program on pages 10 & 11.
- 2 Change TG Series, CS Series and SH Series to U68 input gear. 23M60200S + 20MK6631 required for RL on PTO side of adapter.
- 3 Do not use for continuous duty applications.

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)								BOTTOM OPENING ONLY (RIGHT SIDE TURN PAGE)				
		1010-2A (301111), 1010-4A (301112), 1020-2A (301123), 1020-4A (301124), 1410-2A (301288, 301161)						SAE 8-BOLT OPENING				
								PTO DRIVE GEAR DATA:				
								49T 6P 20° PA Spur	PLMF: .983			
								LOCATION: Front	RPM: 481			
								PLV: 1029 FPM				
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE GEAR												
SINGLE SPEED MULTI GEAR	TG8D-S6805-C1BX	1	Opp	42					Included	Cable	270	51
	TG8D-S6806-C1BX	1	Opp	55					Included	Cable	245	47
	TG8D-S6807-C1BX	1	Opp	65					Included	Cable	230	44
	TG8D-S6808-C1BX	1	Opp	80					Included	Cable	230	44
	TG8D-S6809-C1BX	1	Opp	83					Included	Cable	205	39
	TG8D-S6812-C1BH	1	Opp	102					Included	Cable	210	40
	TG8D-S6813-C1BH	1	Opp	116					Included	Cable	210	40
	TG8D-S6815-C1BH	1	Opp	131					Included	Cable	195	37
	TG8D-S6818-C1BH	1	Opp	155					Included	Cable	175	33
SH SERIES	SH8D-S6807-E1BX		Opp	63					Included	Elec/Air	400	76
	SH8D-S6809-E1BX		Opp	78					Included	Elec/Air	375	71
	SH8D-S6812-E1BX		Opp	104					Included	Elec/Air	325	62
	SH8D-S6813-E1BX		Opp	120					Included	Elec/Air	325	62
CLUTCH SHIFT	CS8D-S6807-E1BX		Opp	63					Included	Power	300	57
	CS8D-S6809-E1BX		Opp	78					Included	Power	275	52
	CS8D-S6812-E1BX		Opp	104					Included	Power	275	52
1 FWD. 1 REV.	RL6D-U6805-L3BX	3	Opp	54		54	29MK8248	23M60062S	Included	Lever	200	38
ADAPTER TO CHANGE ROTATION		2	40TU6886-1 + 23M80375 + 20MK8817					REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX				

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

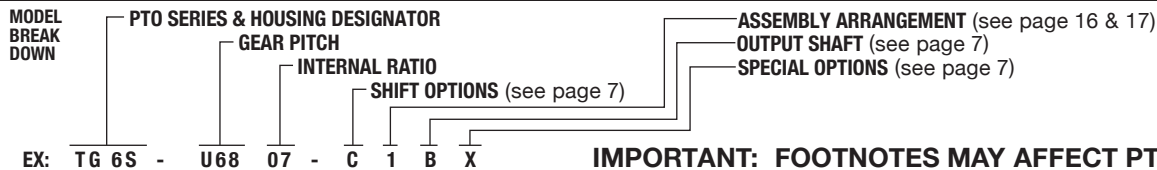

IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION

FOOTNOTES:

- 1 TG Series Input Gear: #03T94243 — Refer to kit program on pages 10 & 11.
- 2 Change TG Series, CS Series, SH Series, and RL Series to 6-bolt PTO housing and U68 input (TG6S, CS6S and SH6S respectively).
Add 23M60200S + 20MK6603 for RL Series on PTO side of adapter.
- 3 Do not use for continuous duty applications.