



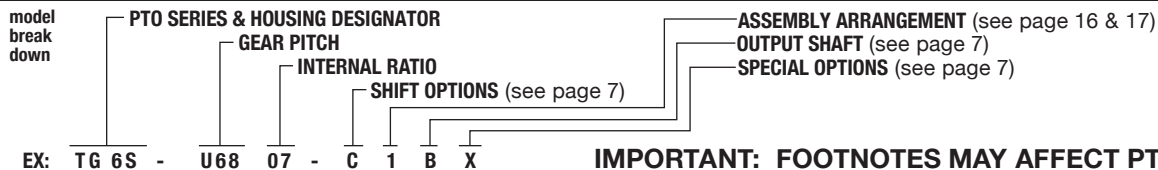


CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)								RIGHT SIDE ONLY (LEFT SIDE TURN PAGE)					
 ES65-5A (301466), ES70-5A (301536), ES72-5A, CM-6052A (301075, 301253, 301413)								SAE 8-BOLT OPENING					PTO DRIVE GEAR DATA:
								6-BOLT TYPE		PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %
					HI	LO	REV					TORQUE	HP
SINGLE GEAR													
SINGLE SPEED MULTI GEAR		TG8S-S6005-C1BX	1	Opp	47				23M80500+23M80295	20MK8816	Cable	270	51
		TG8S-S6006-C1BX	1	Opp	61				23M80500+23M80295	20MK8816	Cable	245	47
		TG8S-S6007-C1BX	1	Opp	72				23M80500+23M80295	20MK8816	Cable	230	44
		TG8S-S6008-C1BX	1	Opp	88				23M80500+23M80295	20MK8816	Cable	230	44
		TG8S-S6009-C1BX	1	Opp	92				23M80500+23M80295	20MK8816	Cable	205	39
		TG8S-S6012-C1BH	1	Opp	113				23M80500+23M80295	20MK8816	Cable	210	40
		TG8S-S6013-C1BH	1	Opp	129				23M80500+23M80295	20MK8816	Cable	210	40
		TG8S-S6015-C1BH	1	Opp	145				23M80500+23M80295	20MK8816	Cable	195	37
		TG8S-S6018-C1BH	1	Opp	172				23M80500+23M80295	20MK8816	Cable	175	33
SH SERIES		SH8S-S6007-E1BX		Opp	69				23M80500+23M80248	20MK8816	Elec/Air	400	76
CLUTCH SHIFT		CS8S-S6007-E1BX		Opp	69				23M80500+23M80248	20MK8816	Power	300	57
1 FWD. 1 REV.													
ADAPTER TO CHANGE ROTATION			No Adapter Available					REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX					

TREMEC TRANSMISSION (SPICER)								RIGHT SIDE ONLY (LEFT SIDE TURN PAGE)					
 ES65-5A (301466), ES70-5A (301536), ES72-5A, CM-6052A (301075, 301253, 301413)								SAE 8-BOLT OPENING					PTO DRIVE GEAR DATA:
								8-BOLT TYPE		PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %
					HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR													
1 FWD. 1 REV.													





IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION


FOOTNOTES:

1 TG Series Input Gear: #03T34286 – Refer to kit program on pages 10 & 11.

CAUTION: MAXIMUM OUTPUT SHAFT SPEED NOT TO EXCEED 2,500 RPM.

TREMEC TRANSMISSION (SPICER)								LEFT SIDE ONLY (RIGHT SIDE TURN PAGE)							
 ES65-5A (301466), ES70-5A (301536), ES72-5A, CM-6052A (301075, 301253, 301413)								SAE 6-BOLT OPENING					PTO DRIVE GEAR DATA:		
								40T 6P 17.5°PA 26°10'37" R.H.					LOCATION: Front PLMF: .809		
6-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO				
				HI	LO	REV					TORQUE	HP			
SINGLE GEAR															
SINGLE SPEED MULTI GEAR	TG6S-S6005-C3BX	1	Opp	47				23M60270	20MK6604	Cable	270	51			
	TG6S-S6006-C3BX	1	Opp	61				23M60270	20MK6604	Cable	245	47			
	TG6S-S6007-C3BX	1	Opp	72				23M60270	20MK6604	Cable	230	44			
	TG6S-S6008-C3BX	1	Opp	88				23M60270	20MK6604	Cable	230	44			
	TG6S-S6009-C3BX	1	Opp	92				23M60270	20MK6604	Cable	205	39			
	TG6S-S6012-C3BH	1	Opp	113				23M60270	20MK6604	Cable	210	40			
	TG6S-S6013-C3BH	1	Opp	129				23M60270	20MK6604	Cable	210	40			
	TG6S-S6015-C3BH	1	Opp	145				23M60270	20MK6604	Cable	195	37			
	TG6S-S6018-C3BH	1	Opp	172				23M60270	20MK6604	Cable	175	33			
SH SERIES	SH6S-S6007-E3BX		Opp	69				23M60187S	20TK4433	Elec/Air	400	76			
CLUTCH SHIFT	CS6S-S6007-E3BX		Opp	69				23M60187S	20TK4433	Power	300	57			
1 FWD. 1 REV.															
ADAPTER TO CHANGE ROTATION			No Adapter Available					REFER TO ADAPTER GEAR ASSEMBLIES IN INDEX							

8-BOLT TYPE	PTO MODEL NUMBER	FOOT NOTES	SHAFT ROTATION	ENGINE %			ADAPTER	SPACER	STUD KIT	SHIFT TYPE	INTERMITTENT RATING @ 1,000 RPM OF PTO	
				HI	LO	REV					TORQUE	HP
SINGLE SPEED MULTI GEAR												
1 FWD. 1 REV.												

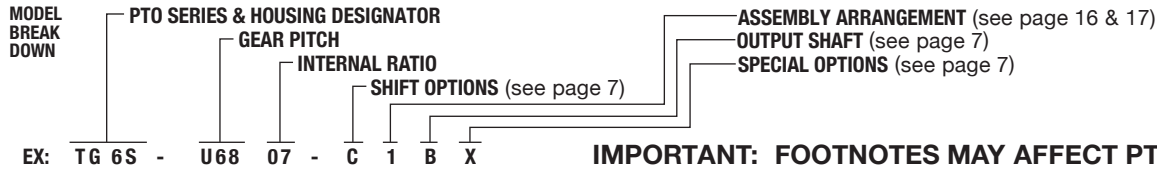

EX: TG 6S - U68 07 - C 1 B X **IMPORTANT: FOOTNOTES MAY AFFECT PTO SELECTION**

FOOTNOTES:

1 TG Series Input Gear: #03T34286 – Refer to kit program on pages 10 & 11.